




**东枫塑料**  
PLASTIC PACKAGING

# Professional Manufacturer of Nylon Cable Ties & Seals

ISO 9001 • REACH ✓ • ROHS • UL • CE • 0 PA US

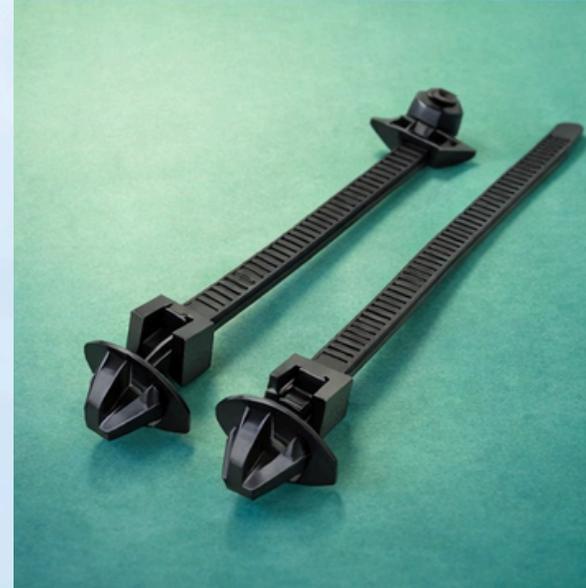

 18256175008

# Product Range Overview (产品总览)

Self-locking Cable Tie  
自锁式尼龙扎带



Double Lock Cable Ties  
双头尼龙扎带



Reusable Cable Tie  
可松式尼龙扎带




Push Mount Cable Tie  
插销式汽车扎带



Stainless Steel Cable Ties  
不锈钢扎带



Cable Seal  
钢丝封条

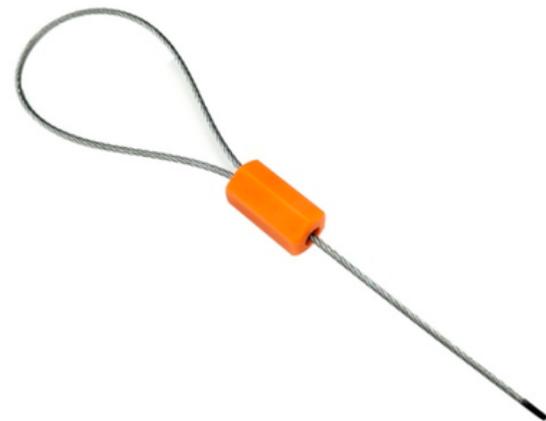

Plastic Security Seal  
塑料封条



Large Tag Plastic Security Seal  
大号标牌塑料封条



We offer a full range of cable ties for industrial, electrical and automotive applications.  
(我们提供完整系列扎带解决方案)

# CABLE TIE SPECIFICATION 扎带信息

**3.6**

**X**

**200**

宽度 / Width: 3.6mm



长度 / Length: 200mm

Available in Multiple Color (多种颜色可以选择)



Pieces Per Bag (包装数量)

10Pcs条/100Pcs条/250Pcs条/  
500Pcs条/1000Pcs条



# CABLE TIE SPECIFICATION 扎带信息

## Width Classification (宽度分类说明)

### 尼龙扎带宽度与强度对比

NYLON CABLE TIE WIDTH & STRENGTH COMPARISON

宽度 Width	类型 / 强度 Type / Strength	适用场景 Applications	强度等级 Strength Level
2.5 mm	Miniature (微型)	电子、电器内部布线 Electronics, small wiring	★ 轻型 Light Duty
3.6 mm	Intermediate (中型) ★★	家用、办公线束整理 General purpose use	★★ 中型 Medium Duty
4.8 mm	Standard (标准型) ★★★	工业 / 日常通用 Industrial & daily use	★★★ 标准型 Standard Duty
7.6 mm	Heavy Duty (重型) ★★★★	重型线束、户外固定 Heavy cables, outdoor use	★★★★ 重型 Heavy Duty
9.0 mm	Heavy Duty (加强型) ★★★★★	更大承重需求 Larger & heavier bundling	★★★★★ 加强型 Extra Heavy Duty
12.5 mm	Extra Heavy Duty (超重型) ★★★★★	重型工程、极端环境 Heavy-duty, extreme conditions	★★★★★ 超重型 Extra Heavy Duty



## Packing (包装方式)

- PE Bag Packing (100 / 250/500 / 1000 pcs per bag)  
常规袋装 (100 / /250/500 / 1000条/包)
- Box Packing available  
支持盒装包装
- Carton Packing for export  
外箱出口包装
- OEM & Customized Packing Supported  
支持OEM定制包装 (LOGO/标签/彩盒)


### Packaging Options



## Self-locking Cable Tie 自锁式尼龙扎带



- **Material:** UL approved Polyamide 6.6,94 V-2
- **Special Features:** Other special materials are available to reach high/low temperature and UV resistance.
- **Color:**All colors are available
- **The design of bend tail makes easy to insert into the locker**
- **Temperature Range:**-40Cto+85C(-40F to 185F)
  
- **材质:**UL认证的尼龙66，阻燃等级94V-2。
- **特殊特性:**可提供其他特种材料以满足高低温耐受性和抗紫外线需求。
- **颜色:**所有颜色均可提供。
- **弯曲尾部设计便于插入捆扎固定**
- **温度范围:**-40C至+85C。

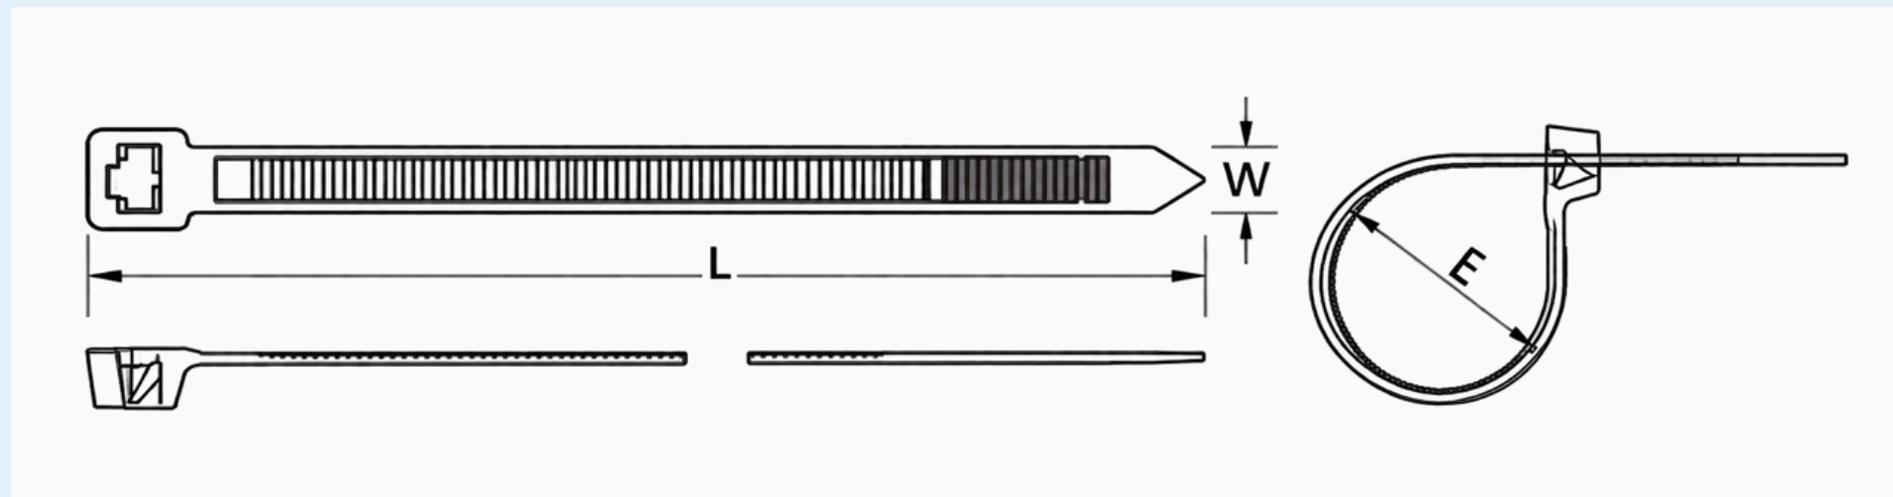

# Self-Locking Nylon Cable Ties Specifications 自锁式尼龙扎带规格参数表

## 3 Series Cable Ties / 3系列 (微型)

Trade-ready specification sheet / 外贸规格表

Size / 规格	Width (mm) / 宽度(mm)	Qty/Bag / 条/包	Bags/Carton / 包/箱	Weight/Bag (kg) / 单包重量(kg)
3x60	2.5	1000	200	0.16
3x80	2.5	1000	200	0.22
3x100	2.4	1000	200	0.22
3x100	2.5	1000	200	0.25
3x120	2.5	1000	150	0.31
3x150	2.4	1000	150	0.34
3x150	2.5	1000	120	0.38
3x160	2.5	1000	120	0.39
3x200	2.5	500	200	0.28
3x250	3	250	240	0.21
3x300	3	250	200	0.24

# 4 Series Cable Ties / 4系列 (标准型)

Trade-ready specification sheet / 外贸规格表

Size / 规格	Width (mm) / 宽度(mm)	Qty/Bag / 条/包	Bags/Carton / 包/箱	Weight/Bag (kg) / 单包重量(kg)
4x100	3.5	500	200	0.21
4x120	3.5	500	200	0.25
4x150	3.5	500	160	0.28
4x150	3.6	500	150	0.33
4x180	3.6	500	140	0.36
4x200	3.4	500	140	0.38
4x200	3.6	500	120	0.42
4x250	3.6	250	200	0.28
4x300	3.6	250	160	0.32
4x350	3.6	250	140	0.39
4x370	3.6	250	120	0.41
4x400	3.9	250	100	0.52
4x450	4	250	80	0.68
4x500	4	250	70	0.74

# 5 Series Cable Ties / 5系列 (热销款)

Best Seller

Trade-ready specification sheet / 外贸规格表

Size / 规格	Width (mm) / 宽度(mm)	Qty/Bag / 条/包	Bags/Carton / 包/箱	Weight/Bag (kg) / 单包重量(kg)
5x100	4.5	250	300	0.14
5x120	4.5	250	250	0.18
5x150	4.5	250	200	0.24
5x160	4.5	250	200	0.26
5x180	4.5	500	100	0.52
5x200	4.5	500	100	0.53
5x200	4.8	500	80	0.62
5x250	4.5	250	150	0.37
5x250	4.8	250	140	0.37
5x280	4.8	250	120	0.43
5x300	4.8	250	120	0.45
5x350	4.8	250	100	0.53
5x380	4.8	250	100	0.55
5x400	4.8	250	100	0.60
5x450	4.8	250	80	0.76
5x500	4.8	250	60	0.83
5x550	4.8	250	40	0.98

# 5 Series Cable Ties / 5系列 (热销款)

Best Seller

Trade-ready specification sheet / 外贸规格表

Size / 规格 ▼	Width (mm) / 宽度(mm) ▼	Qty/Bag / 条/包 ▼	Bags/Carton / 包/箱 ▼	Weight/Bag (kg) / 单包重量(kg) ▼
5x600	4.8	250	40	1.08
5x650	4.8	250	40	1.20
5x700	4.8	250	40	1.30

# 6 Series Cable Ties / 6系列

Trade-ready specification sheet / 外贸规格表

Size / 规格	Width (mm) / 宽度(mm)	Qty/Bag / 条/包	Bags/Carton / 包/箱	Weight/Bag (kg) / 单包重量(kg)
6x150	5.6	250	160	0.33
6x200	5.6	250	140	0.38
6x250	5.6	250	120	0.45
6x300	5.6	250	100	0.58
6x350	5.6	250	80	0.68
6x400	5.6	100	150	0.32
6x450	5.6	100	120	0.36
6x500	5.6	100	120	0.43
6x970	5.5	250	20	2.20

# 8 Series Cable Ties / 8系列 (工业型)

Trade-ready specification sheet / 外贸规格表

Size / 规格	Width (mm) / 宽度(mm)	Qty/Bag / 条/包	Bags/Carton / 包/箱	Weight/Bag (kg) / 单包重量(kg)
8x150	7.2	100	250	0.18
8x200	7.2	100	200	0.22
8x200	7.6	100	200	0.24
8x250	7.2	100	200	0.27
8x250	7.6	100	200	0.30
8x300	7.2	100	150	0.30
8x300	7.6	100	150	0.36
8x350	7.2	100	140	0.38
8x350	7.6	100	120	0.43
8x380	7.6	100	120	0.44
8x400	7.2	100	140	0.39
8x400	7.6	100	100	0.48
8x450	7.2	100	100	0.49

# 8 Series Cable Ties / 8系列 (工业型)

Trade-ready specification sheet / 外贸规格表

Size / 规格	Width (mm) / 宽度(mm)	Qty/Bag / 条/包	Bags/Carton / 包/箱	Weight/Bag (kg) / 单包重量(kg)
8x450	7.6	100	100	0.55
8x500	7.2	100	80	0.53
8x500	7.6	100	80	0.62
8x550	7.6	100	60	0.70
8x600	7.6	100	60	0.80
8x650	7.6	100	50	0.86
8x700	7.8	100	50	0.93
8x750	7.8	100	50	1.08

# 10 Series Cable Ties / 10系列 (重型)

Trade-ready specification sheet / 外贸规格表

Size / 规格	Width (mm) / 宽度(mm)	Qty/Bag / 条/包	Bags/Carton / 包/箱	Weight/Bag (kg) / 单包重量(kg)
10x400	8.8	100	80	0.56
10x450	8.8	100	80	0.60
10x500	8.8	100	70	0.67
10x550	8.8	100	40	0.93
10x600	8.8	100	40	0.99
10x650	8.8	100	40	1.08
10x720	8.8	100	40	1.36
10x760	8.8	100	40	1.40
10x800	8.8	100	35	1.50
10x900	8.8	100	30	1.75
10x1000	8.8	100	30	1.95
10x1200	8.8	100	25	2.25
10x1500	8.8	50	25	1.65


# 12 Series Cable Ties / 12系列 (超重型)

Trade-ready specification sheet / 外贸规格表

Size / 规格	Width (mm) / 宽度(mm)	Qty/Bag / 条/包	Bags/Carton / 包/箱	Weight/Bag (kg) / 单包重量(kg)
12x300	12	100	70	0.83
12x500	12	100	35	1.38
12x600	12	100	30	1.65
12x650	12	100	30	1.80
12x700	12	100	20	1.95
12x760	12	100	20	2.05
12x800	12	100	20	2.20
12x860	12	100	20	2.35
12x900	12	100	20	2.30

## RELEASABLE CABLE TIE 可松式扎带

- Material: UL approved Polyamide6.6,94 V-2
- Special Features: The special design makes channel on both sides of tie to increase the performance of tensile strength.
- Color: All colors are available
- The extended pawl allows for simple and quick release of the ties
- Temperature Range: +85C to -40C (185F to -40F)
- 材质: UL认证的尼龙66, 阻燃等级94V-2
- 特殊特性: 独特的导槽设计贯穿扎带两侧, 有效增强抗拉强度性能
- 颜色: 所有颜色均可提供
- 加长卡爪结构, 便于快速简便地松开扎带
- 工作温度: -40C至+85C

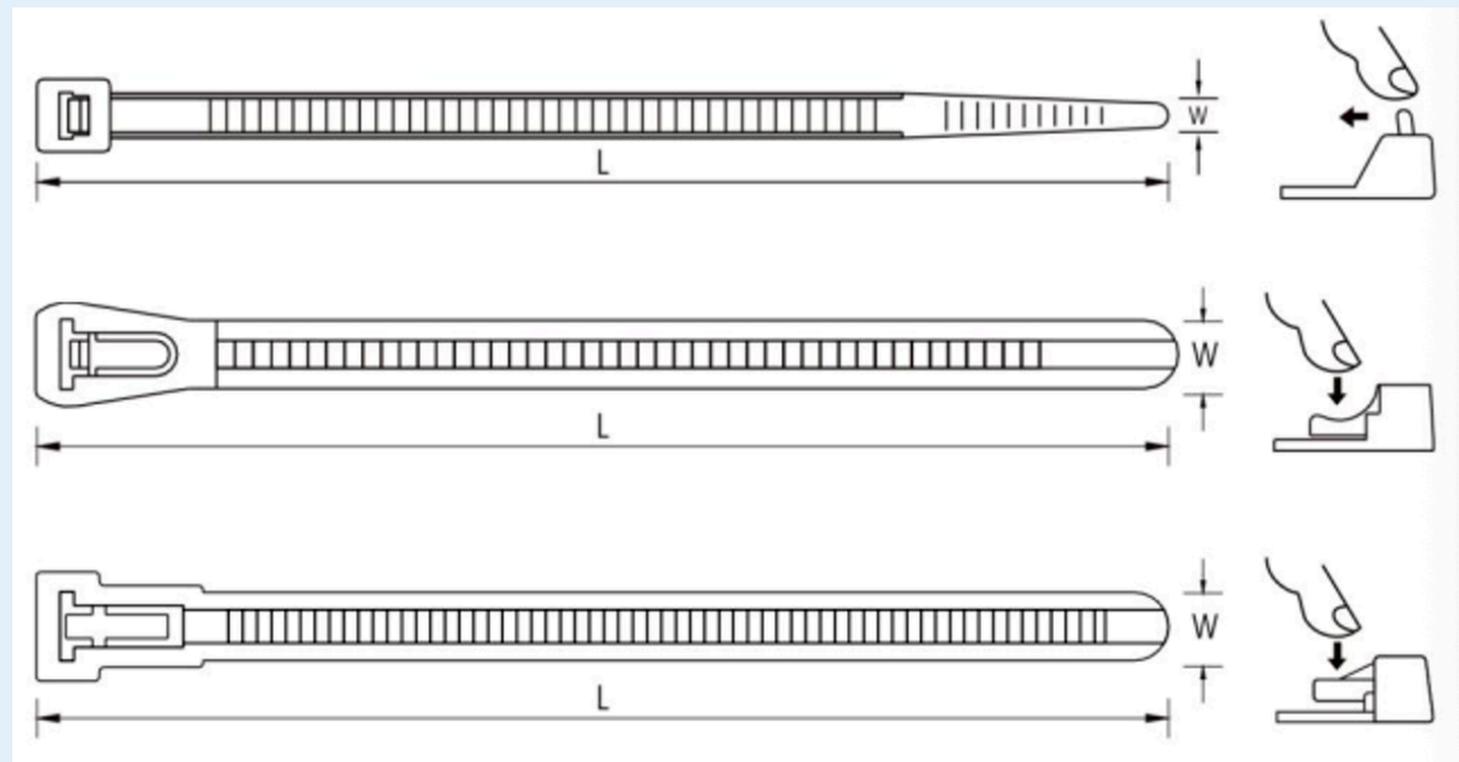


## 双头扎带 DOUBLE LOOPTIES



- Material: UL approved Polyamide 6.6,94 V-2
- Cable tie designed with two heads which creates an inside and outside serrated loop
- For parallel routing of two bundles with only one cable tie
- Bundles can be of different diameter
- Color: All colors are available
- Temperature Range: +85C to -40C (185F to -40F)

- 材质: UL认证PA6.6, 阻燃等级94V-2
- 双头结构, 创新双头设计形成内外锯齿环
- 单个扎带实现两根电线平行布线
- 不同直径电线的可同步固定
- 颜色: 所有颜色可选
- 工作温度: -40C至+85C

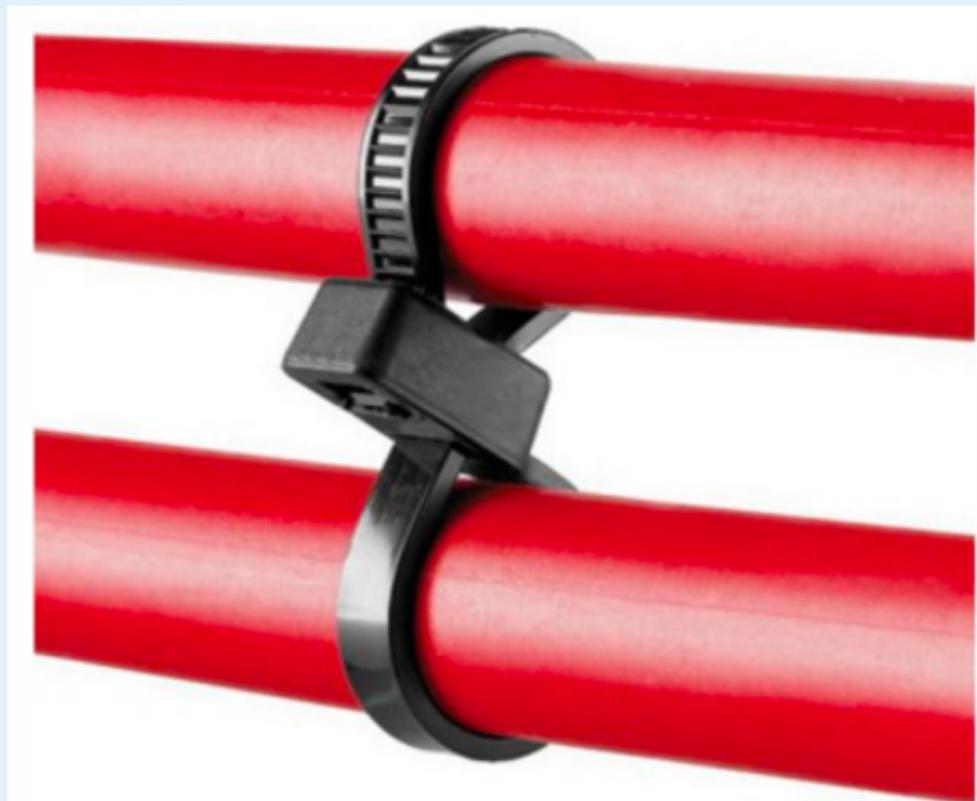

# 双扣扎带 捆的更多

## Double-Loop Cable Ties – Tie More, Secure More

Standard cable ties can only bundle one at a time



捆扎电线  
Cable Bundling




捆绑物品  
Object Bundling



捆扎管道  
Pipe Bundling



组合产品  
Multi-Item Bundling

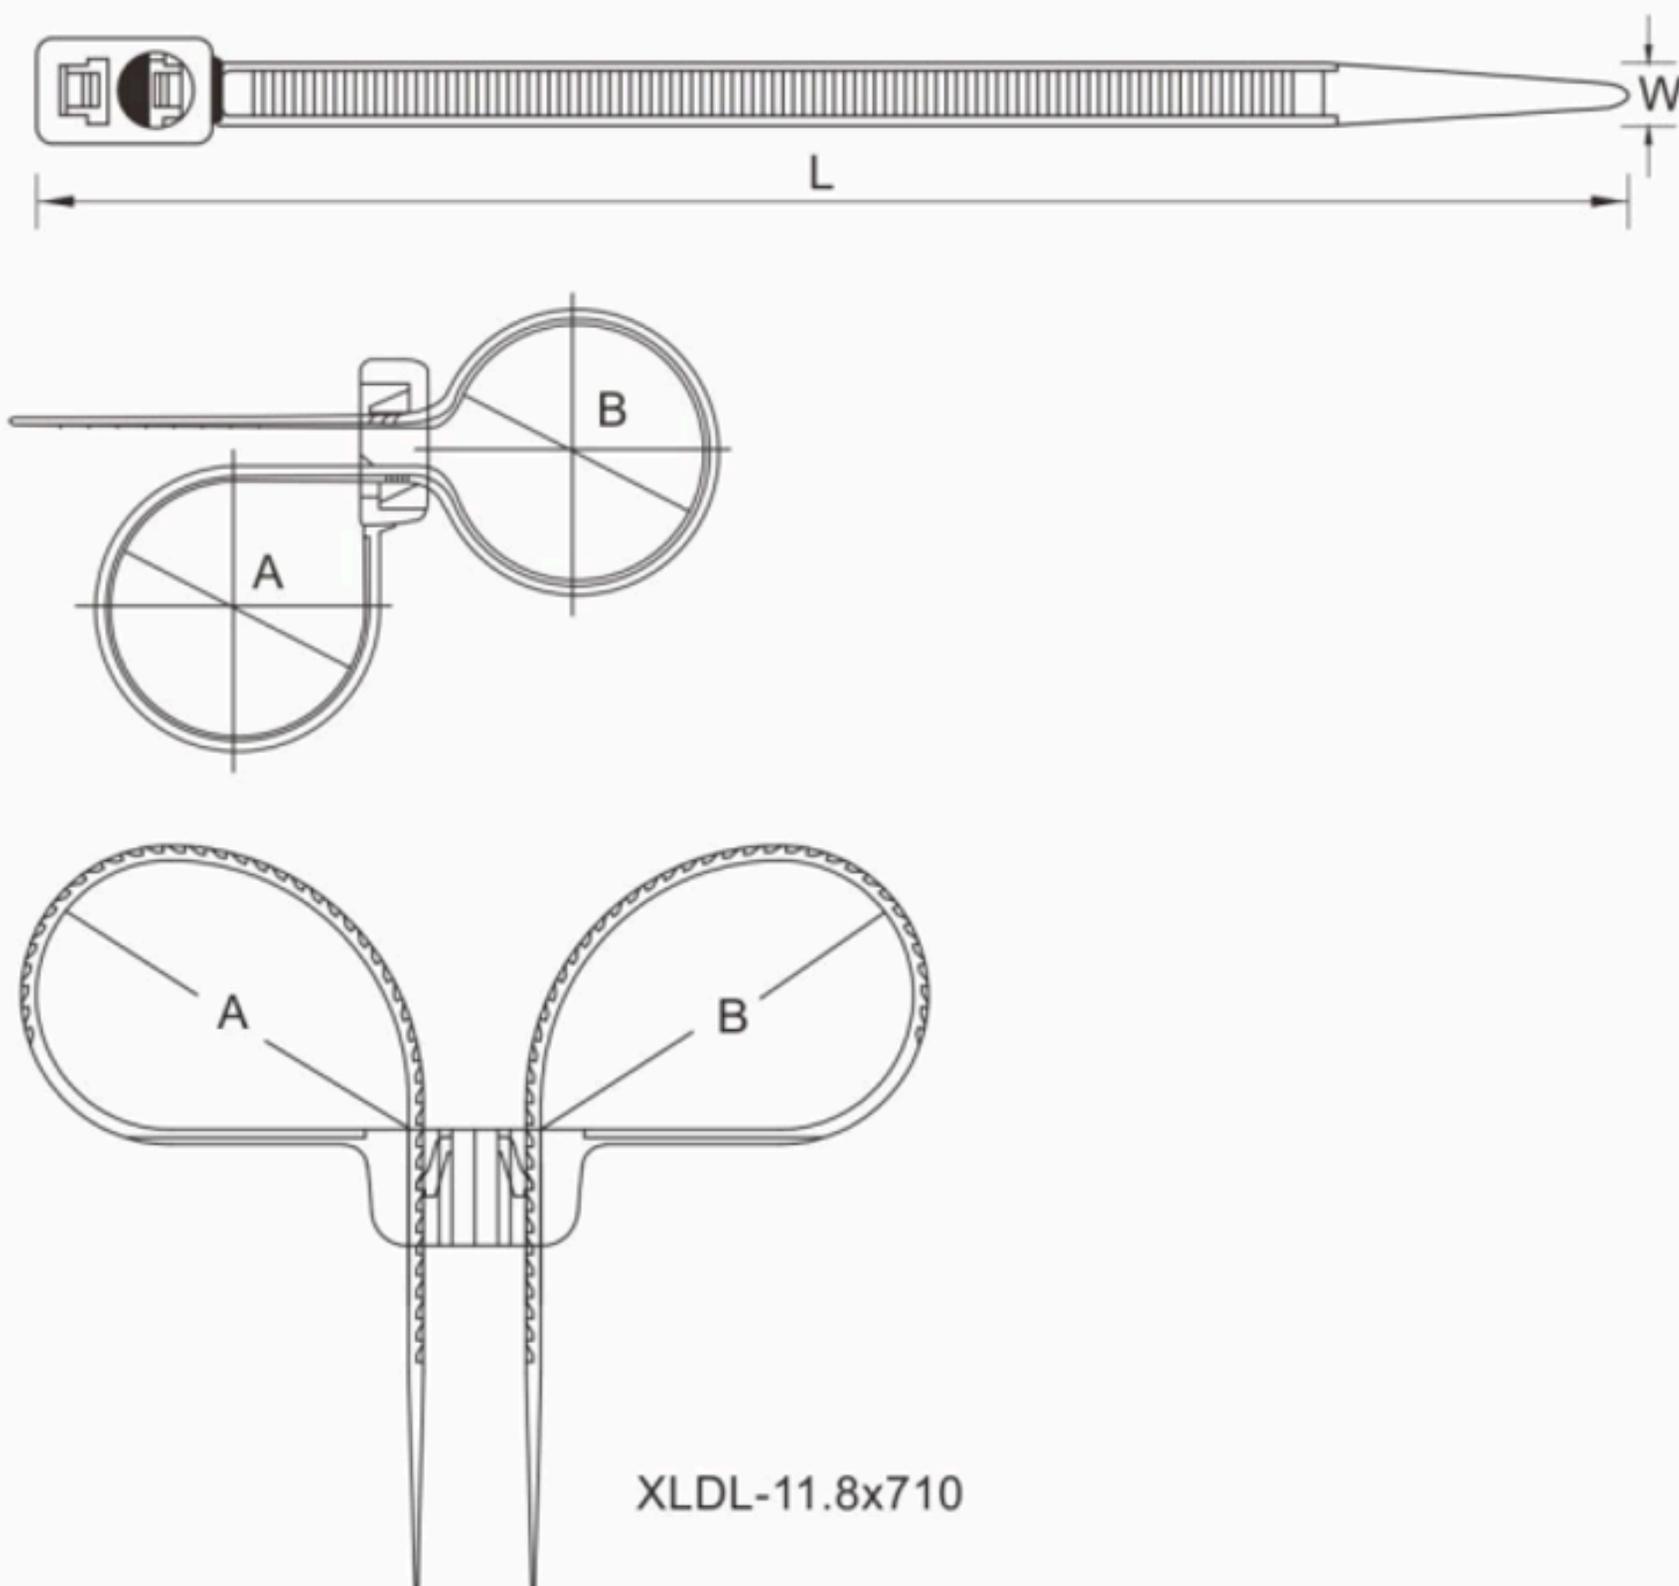

## Push Mount Cable Tie 插销式汽车扎带




- **Material:** UL approved Polyamide 6.6,94V-2
  - **Special Features:** other special materials are available to reach high/low temperature and UV resistance
  - **Color:** Standard color is Natural, Black, and other special colors are available upon request.
  - Cable tie head always situated in defined position
  - Arrowhead simply locks into place
  - Supporting legs provide a secure and firm fixing in areas where space is limited
  - Releasable and there for reusable
- 
- **材质:**UL认证PA6.6，阻燃等级94V-2
  - **特殊特性:**可根据需求选用特种材料，实现高低温耐受及抗紫外线性能
  - **颜色:**标准色为白色/黑色，支持定制特殊颜色
  - 扎带头采用定位设计
  - 箭头锁扣快速卡扣式安装
  - 支撑脚结构适用于狭小空间固定
  - 可拆卸设计支持重复使用

# 多种用途 满足各种需求

Versatile Applications – Meet Various Needs

适用于汽车束线主机厂，传感器长、电气线束固定等

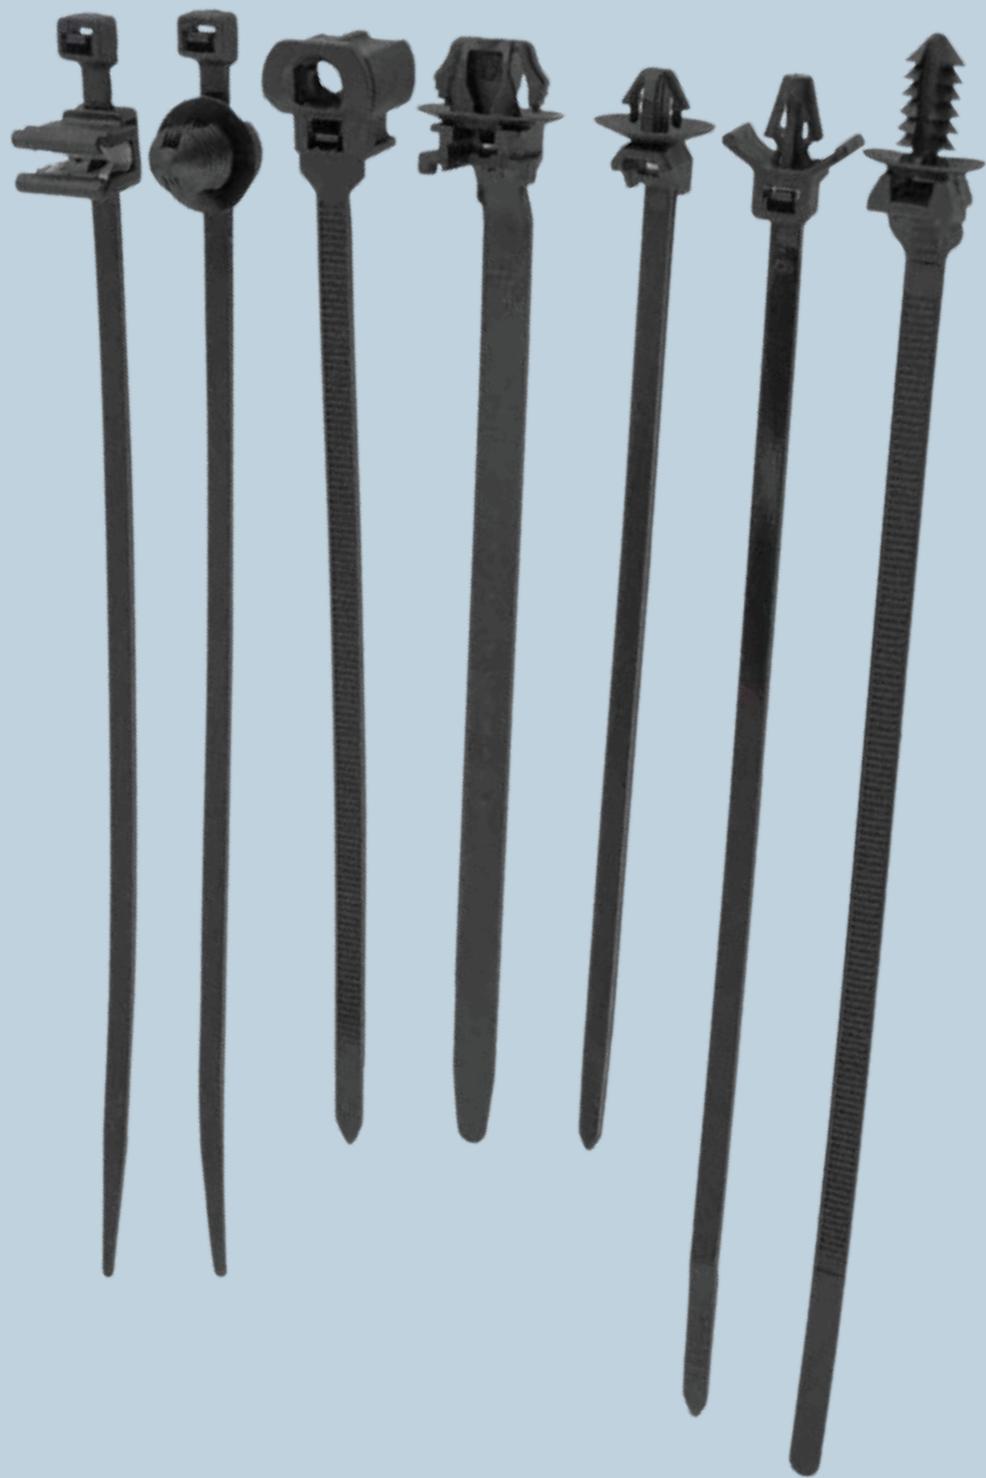

汽车生产

Automotive Assembly



摩托修理

Motorcycle Repair



基板固定


Panel Mounting



铁架固定

On Rail Mounting

# 不锈钢扎带 STAINLESS STEEL CABLE TIES

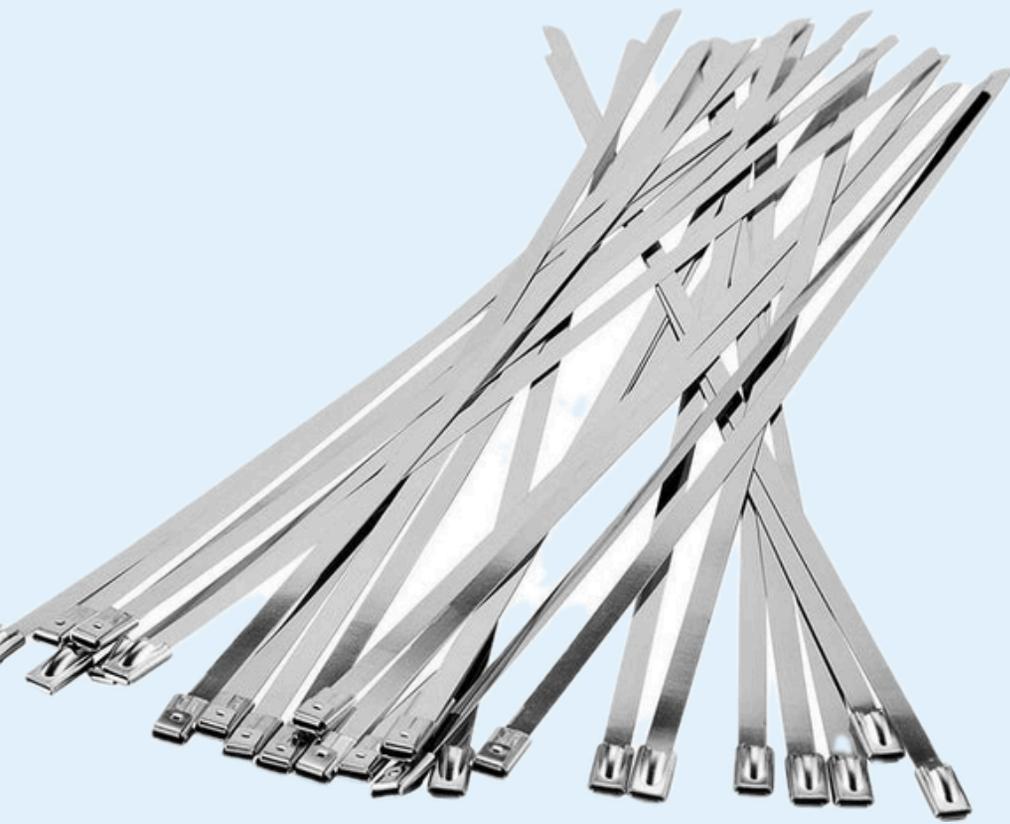

- Material: All lengths are available, Stainless steel type: 304, 316,
- Special sizes can be customized;
- Feature: They have a unique ball locking mechanism that allows easy and quick installation and removal,
- High tensile strength; Non-flammability High resistance to acetic acid, alkali acid, sulphuric acid, corrosion...etc;
- Working temperature:  $-60^{\circ}\text{C} \sim 150^{\circ}\text{C}$
- 材料: 采用不锈钢304、316材质, 各种长度皆可制作, 特殊规格按客户供样制作;
- 特点: 耐酸、耐腐蚀、抗张强度高, 使用简单, 快捷等优势;
- 工作温度范围:  $-60^{\circ}\text{C} \sim 150^{\circ}\text{C}$



工业设备

Industrial Equipment



户外设备



Outdoor Equipment



管道固定

Pipe Fastening

# Plastic Security Seal 塑料封条

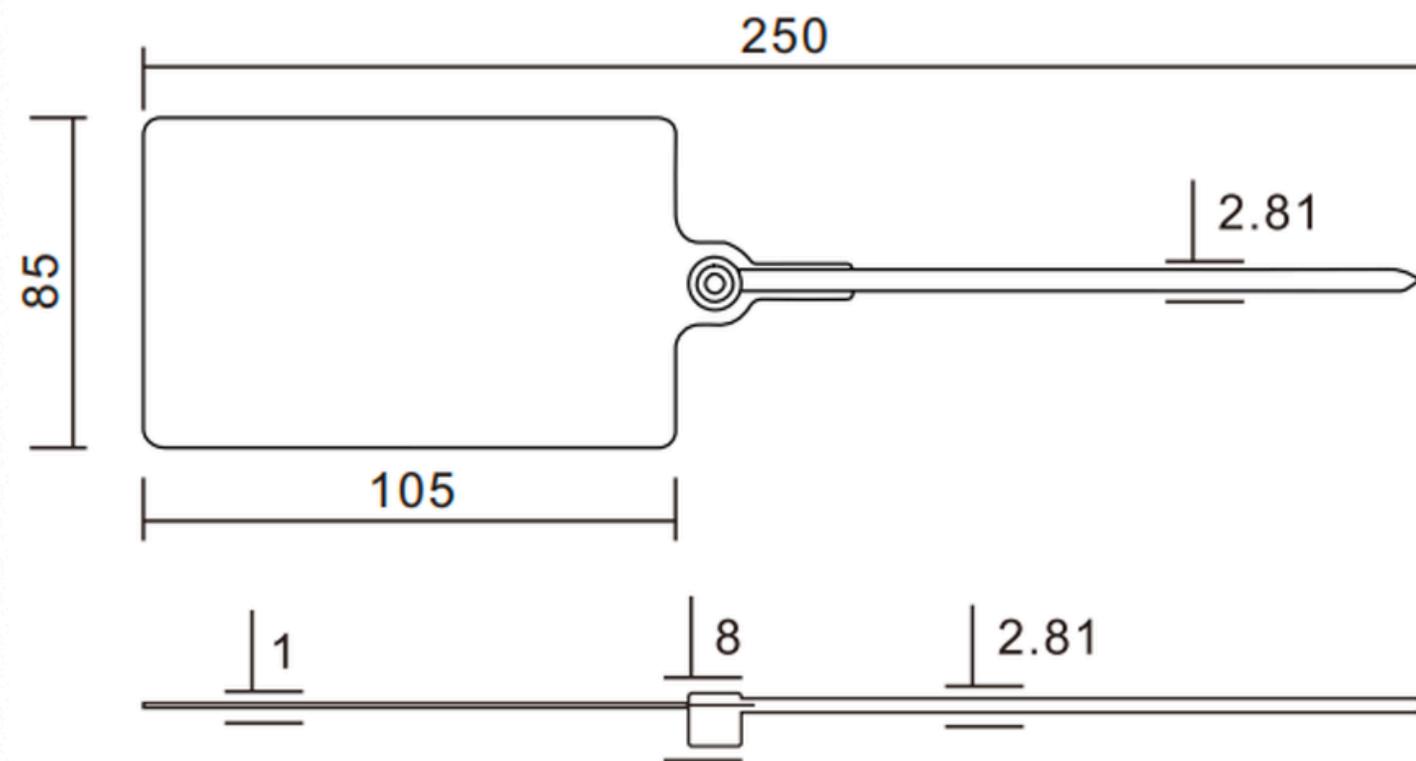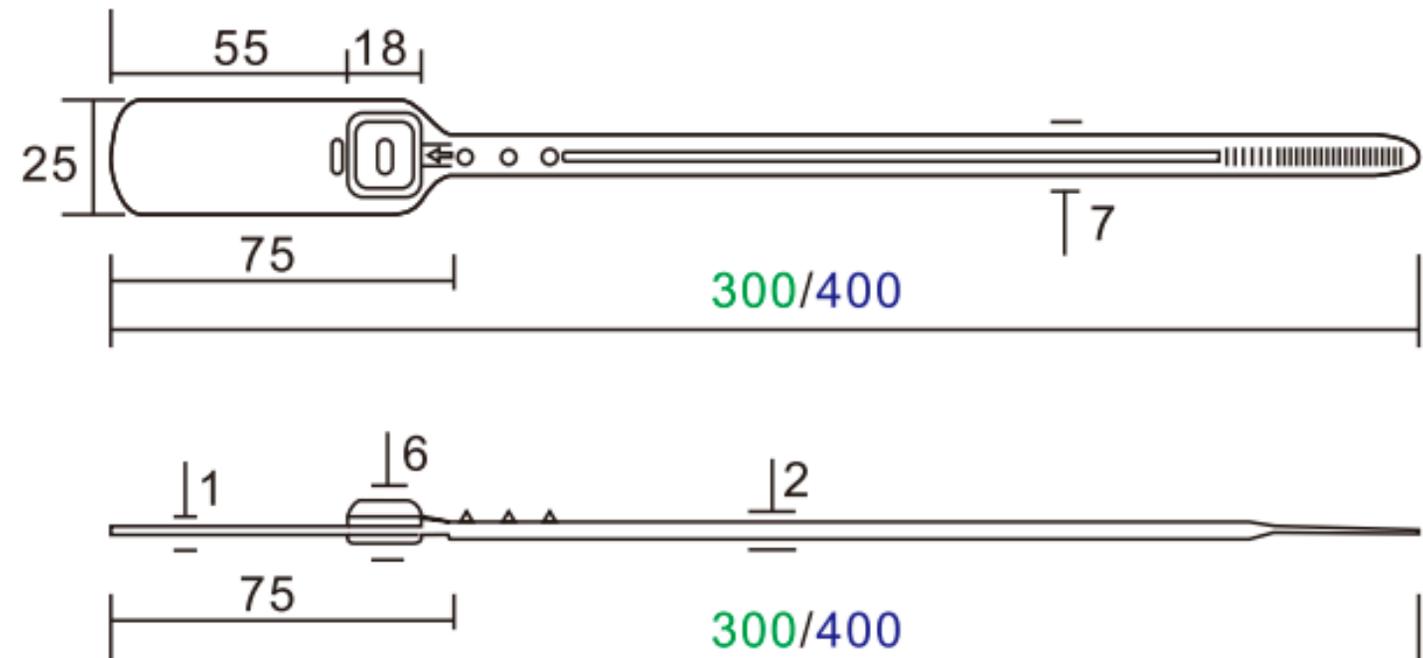

# Versatile Identification & Security Tag Solutions

## 多场景应用标识解决方案

### 仓储标识

#### Warehouse Identification

- + 品牌展示, 条形码二维码可定制
- 一次 Sorting & Identification

### 仓储标识

- 品牌展示 · 防调包
- Brand Display & Anti-switch

### 商品标识

- + 条码 / 二维码可定制
- Barcode / QR Code Available

### 防拆防调包

- + 一次性锁扣 · 不可重复使用
- One-time Locking

### 果树标记

#### Plant / Tree Tag

- 户外使用 · 防水抗UV





### 工业标识

#### Industrial Identification

- 线束管理, 设备标记



# Cable Seal 钢丝封条

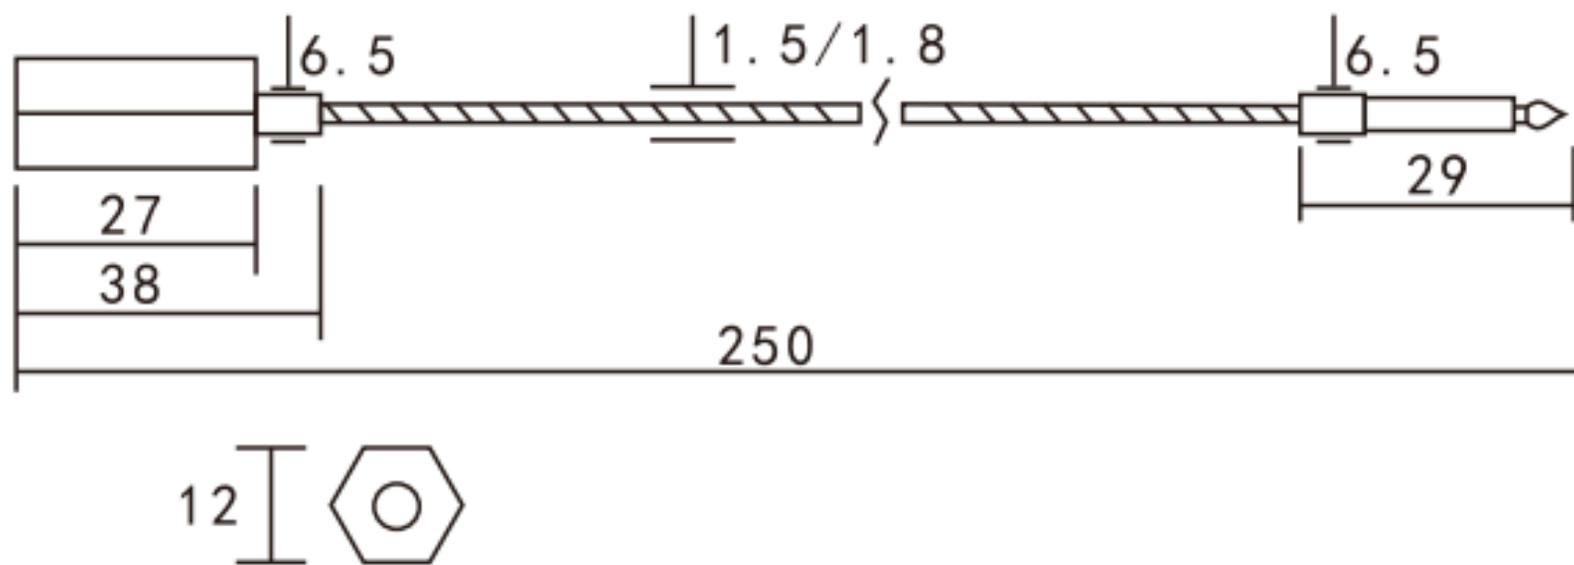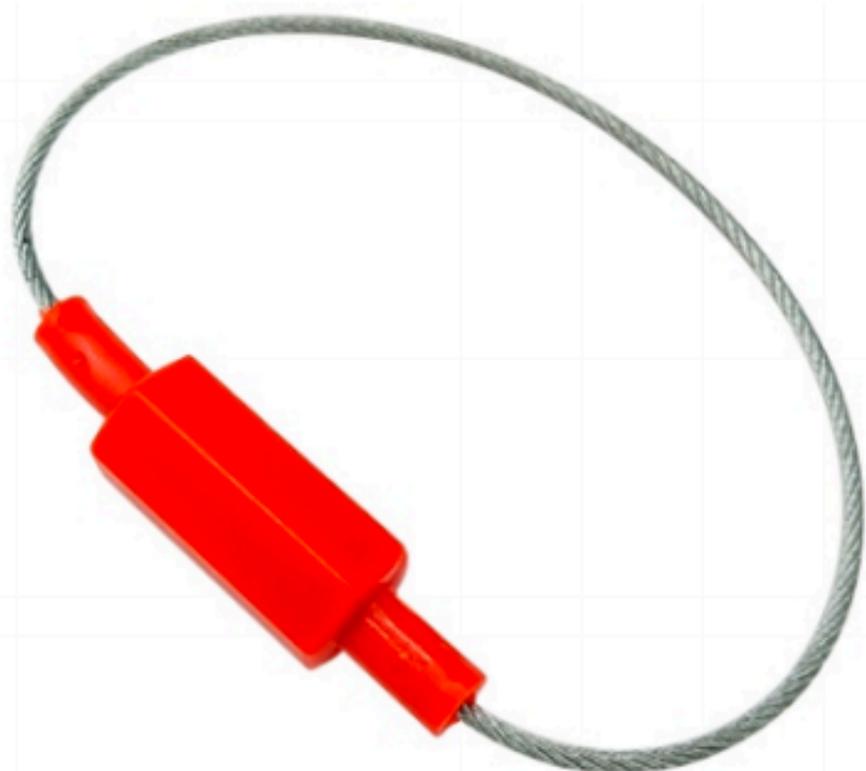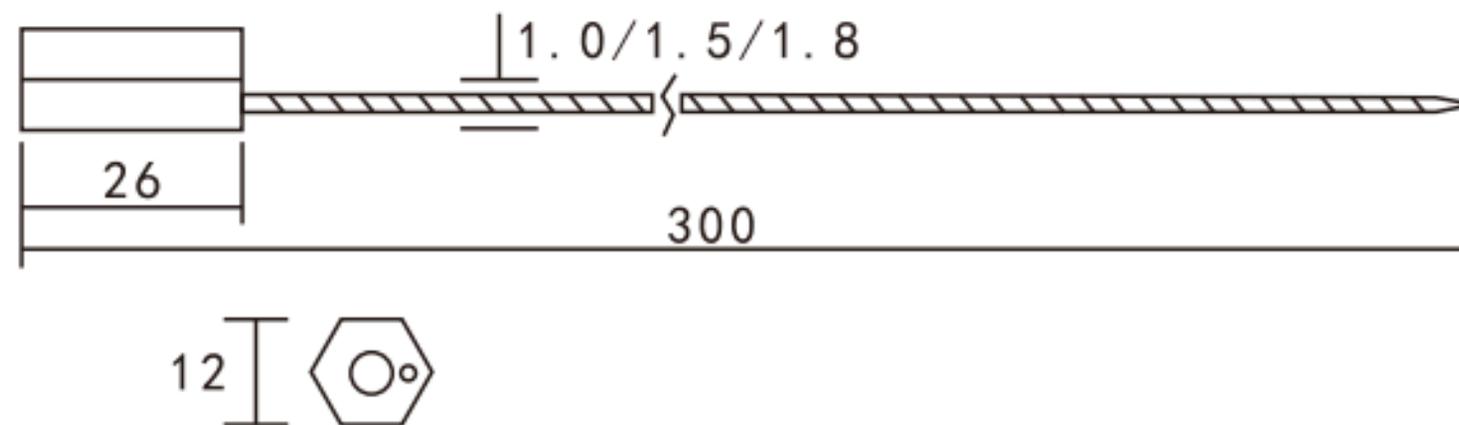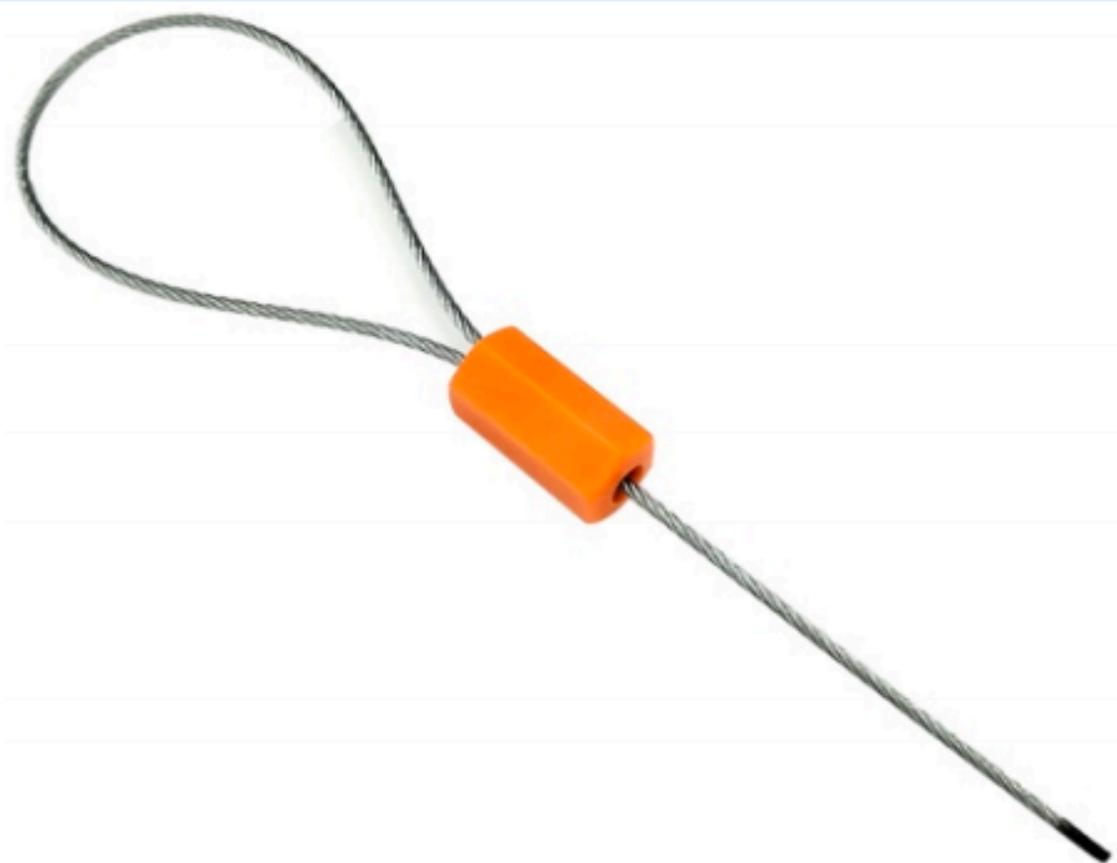

Designed for Safety 设计


# Wide Range of Applications

• Forestry and Planting • Safety Valves • Logistics and Transport • Water Meters


园林种植 • 安全阀门 • 物流运输 • 水表电表



Forestry and Planting  
园林种植

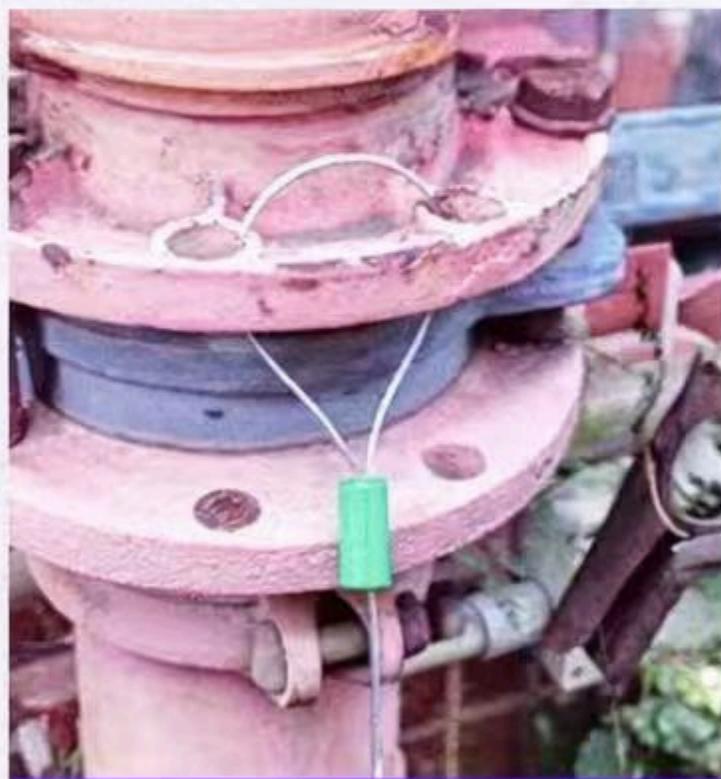

Safety Valves  
安全阀门

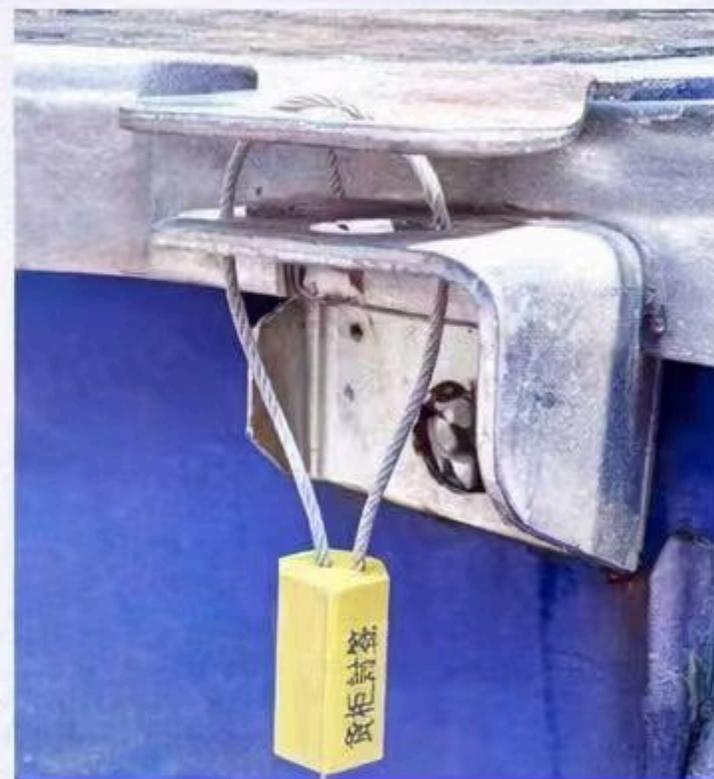

Logistics and Transport  
物流运输



Water Meters  
水表电表